

Wherwell Village Hall

Instructions for the use of the Portable PA System

KAM RZ12A Portable PA-BT, and wireless headset and microphone

Note: To move the PA, use the side handles that are fixed to the PA. To roll the PA on its wheels, use the retractable handle on the top. Do not lift the PA by the retractable handle.



Portable PA

1. Ensure the volume controls on the PA are turned down.
2. Attach the power lead to the PA, plug it into a power socket, and turn the PA power button on.
3. On the back of the PA, select the relevant 'Mode' by pressing the mode button in the 'Digital Media Player' section:
 - FM for the radio
 - Status Line for the microphone (headset or lollipop)
 - Bluetooth to connect a device (phone, tablet or laptop)

To connect a Device to the PA

1. For music, link a mobile phone, tablet or laptop to the PA using either:
 - Bluetooth (ensure the 'Mode' on the PA is set to 'Bluetooth'). On the device select the PA name: PA15. Once Bluetooth connection is established the PA screen will read "HAS-LINK".
 - or
 - The 3.5mm jack (ensure the 'Mode' on the PA is set to 'Status Line') – connect the phono line input and output to the sockets on the PA marked 'Line in', and connect the other end to the relevant socket on the device.
2. Volume control works via both the PA and the device.

To connect the Headset with microphone to the PA

Note: The Prosound system has a **Receiver** (the larger box) and a **Transmitter** (the smaller box).

1. Plug the power cable into the Prosound **Receiver** and then plug the **Receiver** into a power socket.
2. Plug the **Receiver** into one of the microphone sockets marked MIC1 or MIC2 on the 'Audio Inputs and Outputs' section of the PA.
3. Plug the headset into the **Transmitter** and switch the **Transmitter** on.
4. A green light 'RF-A' or 'RF-B' will appear on the **Receiver**.
5. Adjust the volume on the **Transmitter** (twist knob) and/or the PA (MIC volume).
6. Conceal/tidy the **Transmitter** in a pocket or using the integral belt clip.

Note: The microphone needs to be directly in front of, and slightly below, your mouth for it to work effectively.




To connect the Lollipop Microphone to the PA

1. Turn the microphone on.
2. On the PA, in the 'Wireless Microphones' section, push in the VHS button – the red power light will come on as will the green light marked 'RF-A'.
3. Adjust the volume A button on the 'Wireless microphone' section of the PA.

After use of the PA, Headset and Microphone

1. Turn off the PA and receiver, and switch off at the mains, unplug and disconnect any cables.
2. Turn off the transmitter and microphone to save battery power.
3. Replace the headset, transmitter and receiver into their storage box.

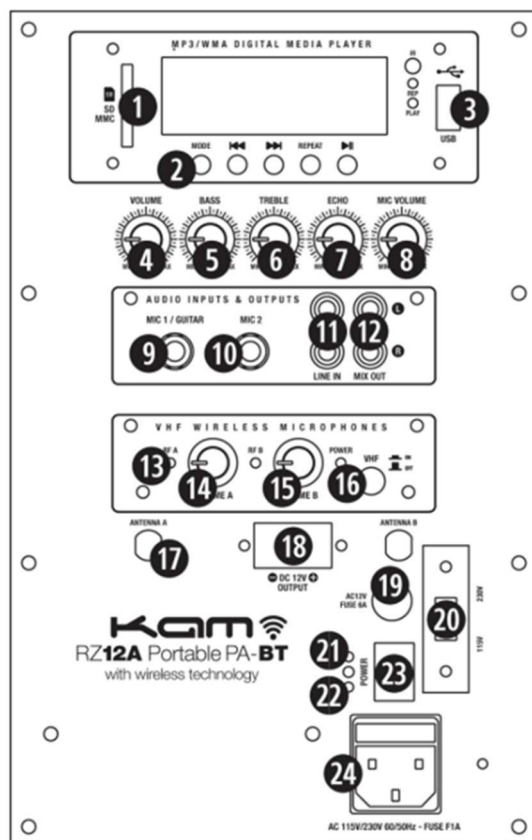

Kam RZ12A Portable PA-BT

1. SD/MMC card input
2. Media player control
3. USB input (memory stick)
4. Master output volume control
5. Bass EQ adjustment
6. Treble EQ adjustment
7. Echo control
8. Microphone volume control
9. Mic 1 / guitar - 6.3mm jack input
10. Mic 2 - 6.3mm jack input
11. RCA phono line inputs
12. RCA phono line outputs
13. Wireless mic signal indicator LEDs
14. Wireless mic channel A volume control
15. Wireless mic channel B volume control
16. VHF wireless system on/off power button
17. Antenna for VHF wireless system
18. 12 volt DC output connection
19. Fuse socket
20. 110/220V switch
21. Battery charging indicator LED
22. Power indicator LED
23. Mains power switch
24. IEC mains power input